


Y cable

TYC3

series

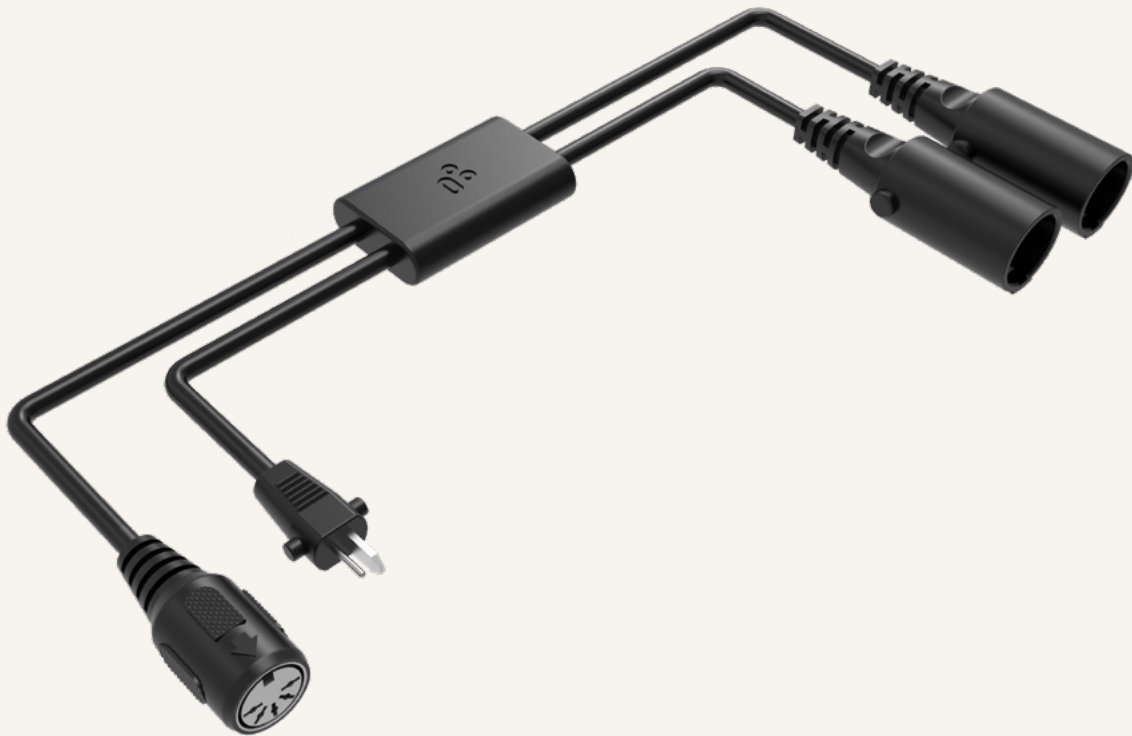

Product Segments


- **Care Motion**
- **Comfort Motion**
- **Ergo Motion**
- **Industrial Motion**

General Features

Extension cable for multiple connector type and socket

Drawing


Standard Dimensions
(mm)

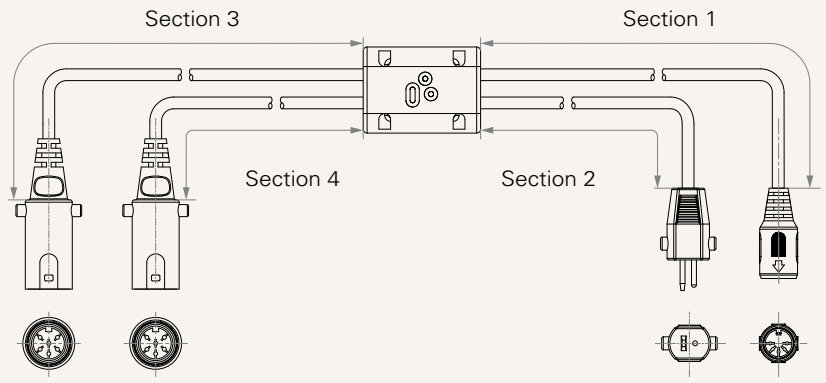


Cable Inlet / Outlet Type	2 = 2 inlets 2 outlets See page 4	3 = 2 inlets 3 outlets	
Color	1 = Black	2 = Grey (Pantone 428C)	
Connector	X = Tinned leads	0 = Female (socket)	1 = Male (plug)
Connector Angle	0 = Tinned leads	1 = 90°	2 = 180°
Connector Type	1 = DIN 4P 2 = Long DIN 5P (240°) 3 = Short DIN 5P (180°) 4 = DIN 6P	5 = DIN 8P (270°) 6 = Big 01P 7 = Small 01P 8 = RJ 10P	E = Molex 8P F = Flat RJ 10P X = Tinned leads B = Small 01P, with installation hole
O Ring (for Male Connector)	0 = Without 1 = Red (without MCU)	2 = Yellow (with MCU) 3 = Blue	4 = Black 5 = White
Anti Pulling Clip (for Female Connector)	0 = without	1 = with	
Cable Length (mm)	1 = 100 2 = 200 3 = 300	4 = 400 5 = 500 6 = 600	7 = 700 8 = 800 9 = 900
Section 5	N = N / A (2 inlets 2 outlets) A = Please insert the code and cable length as Section 1 ~ Section 4		

Cable Inlet / Outlet Type

2 = 2 inlets 2 outlets

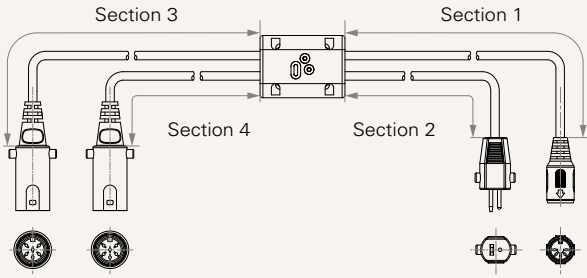

3 = 2 inlets 3 outlets

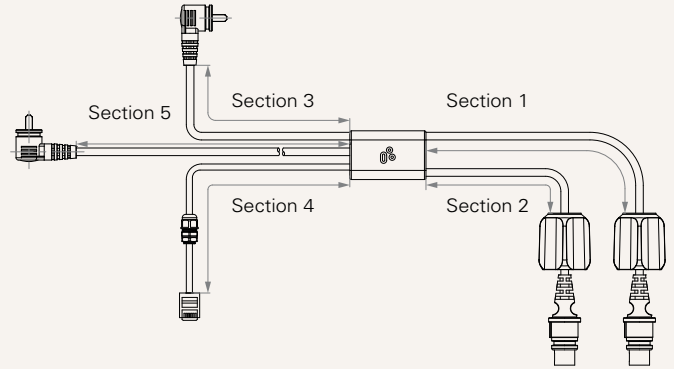

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.